



REFUSE TANKS

Open Top
20-40 Cu. Yd.
Roll-Off

Available Models

- Model OTS-2242 20 cu. yds.
- Model OTS-2252 25 cu. yds.
- Model OTS-2262 30 cu. yds.
- Model OTS-2282 40 cu. yds.

Exceptional Design

Open top design with tapered side walls for easy loading and unloading




Safety & Quality

- Both horizontal and vertical supports for strength
- Tank goes through a 100+ point safety checklist

Cost Savings

- Smooth interior walls save time for cleaning, reduces costs and increases tank life

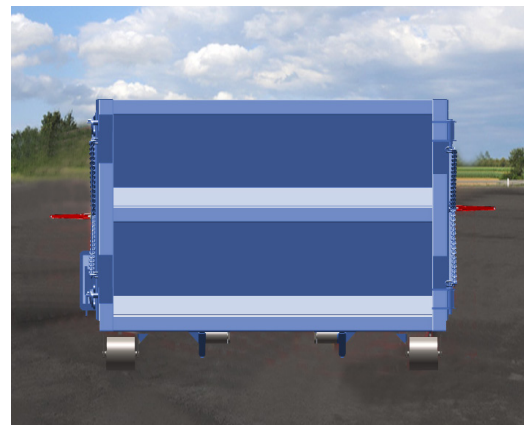

Manitex Sabre's Refuse Tanks and Sludge Tanks are available in four standard sizes and can be used for many applications. These tanks are watertight containers that can be filled and used to temporarily store a variety of liquid or solid materials.

These tanks are ideal for:

- Environmental cleanup projects
- Municipal refuse, recycling and compost
- Construction projects
- Industrial applications

Please give us a call to learn more about these tanks and our other products.

888.772.5580

manitexsabre.com


SPECIFICATIONS

Weights & Measures	OTS-2242	OTS-2252	OTS-2262	OTS-2282
Capacity (Cubic Yards)	20	25	30	40
Tank Wall Height (grade to top)	42"	52"	62"	82"
Tank Length	22' - 10"	22' - 10"	22' - 10"	22' - 10"
Tank Width (tapered 3" per side)	6' - 9 1/4" to 7' - 3 3/8"	6' - 9 1/4" to 7' - 3 3/8"	6' - 9 1/4" to 7' - 3 3/8"	6' - 9 1/4" to 7' - 3 3/8"
Tank Weight (lbs)	5,400	6,060	6,720	7,380

OPTIONS & FEATURES

TANK OPTIONS	Qty	Std	Opt
DESIGN FEATURES			
Dirt shedder and backup plate	1	•	
Front nose rollers: 4" OD x 6"	2	•	
Side swing tailgate with seal	1	•	
1" adjustable door hinge pins	2	•	
Front Hook: 1 1/4" plate	1	•	
Door chain tie-off	1	•	
Tarp Hooks	20	•	
Tarps	1		•
Rear wheels: 8 5/8" diameter x 6"	2	•	

DESIGN FEATURES	Qty	Std	Opt
STRUCTURAL DESIGN			
Floor: 3/16" thick ASTM A36 carbon steel	1	•	
Understructure: 1/4" x 2" x 6" tubing @ 36" ID	1	•	
Sides/ends: 3/16" thick ASTM A36 carbon steel	1	•	
Top: 3/16" x 3" x 4" ASTM A36 tube	1	•	
PAINT SPECIFICATIONS			
Interior blast: SSPC-SP-10/Near White	1		•
Undercoating: Water base asphalt emulsion	1	•	
Exterior blast: SSPC-SP-6/Commercial	1	•	
Exterior coating: Carboline Carbothane 8812/8845 DTM High Gloss Polyurethane 3-5 MILS D.F.T.	1	•	

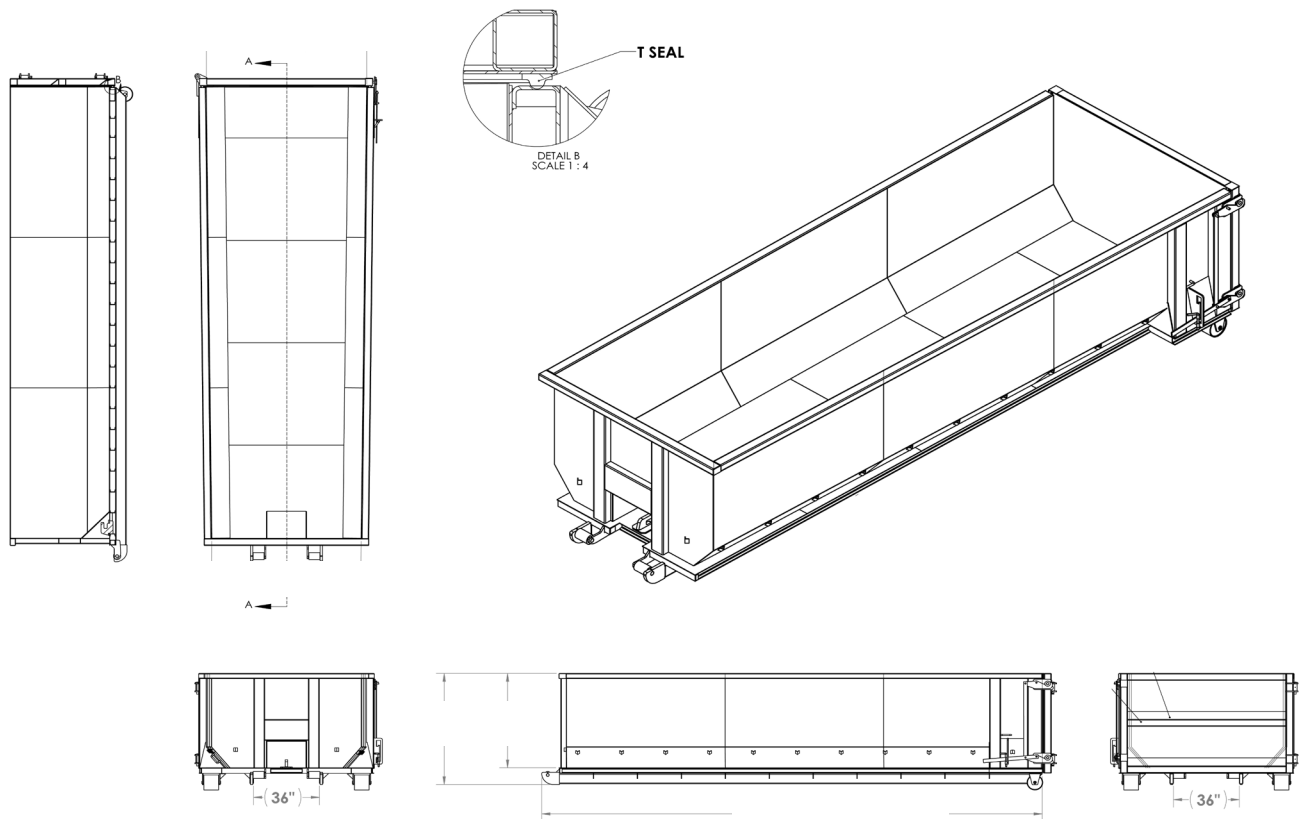

888.772.5580
 sales@manitexsabre.com
 5420 E. State Road 8, Knox, IN 46534
 Proudly made in the USA

manitexsabre.com
 a division of Manitex International